

FIG. 1



2/8

BYTE K2 BITS 6, 7, 8 (CHANNEL STATUS) DEFINITION 12
111 = AIS-L
110 = RDI-L
101 = NOT USED
100 = NOT USED
011 = ET (EXTRA TRAFFIC ON PROTECTION CHANNEL)
010 = BRIDGED AND SWITCHED
001 = BRIDGED
000 = IDLE

FIG. 2



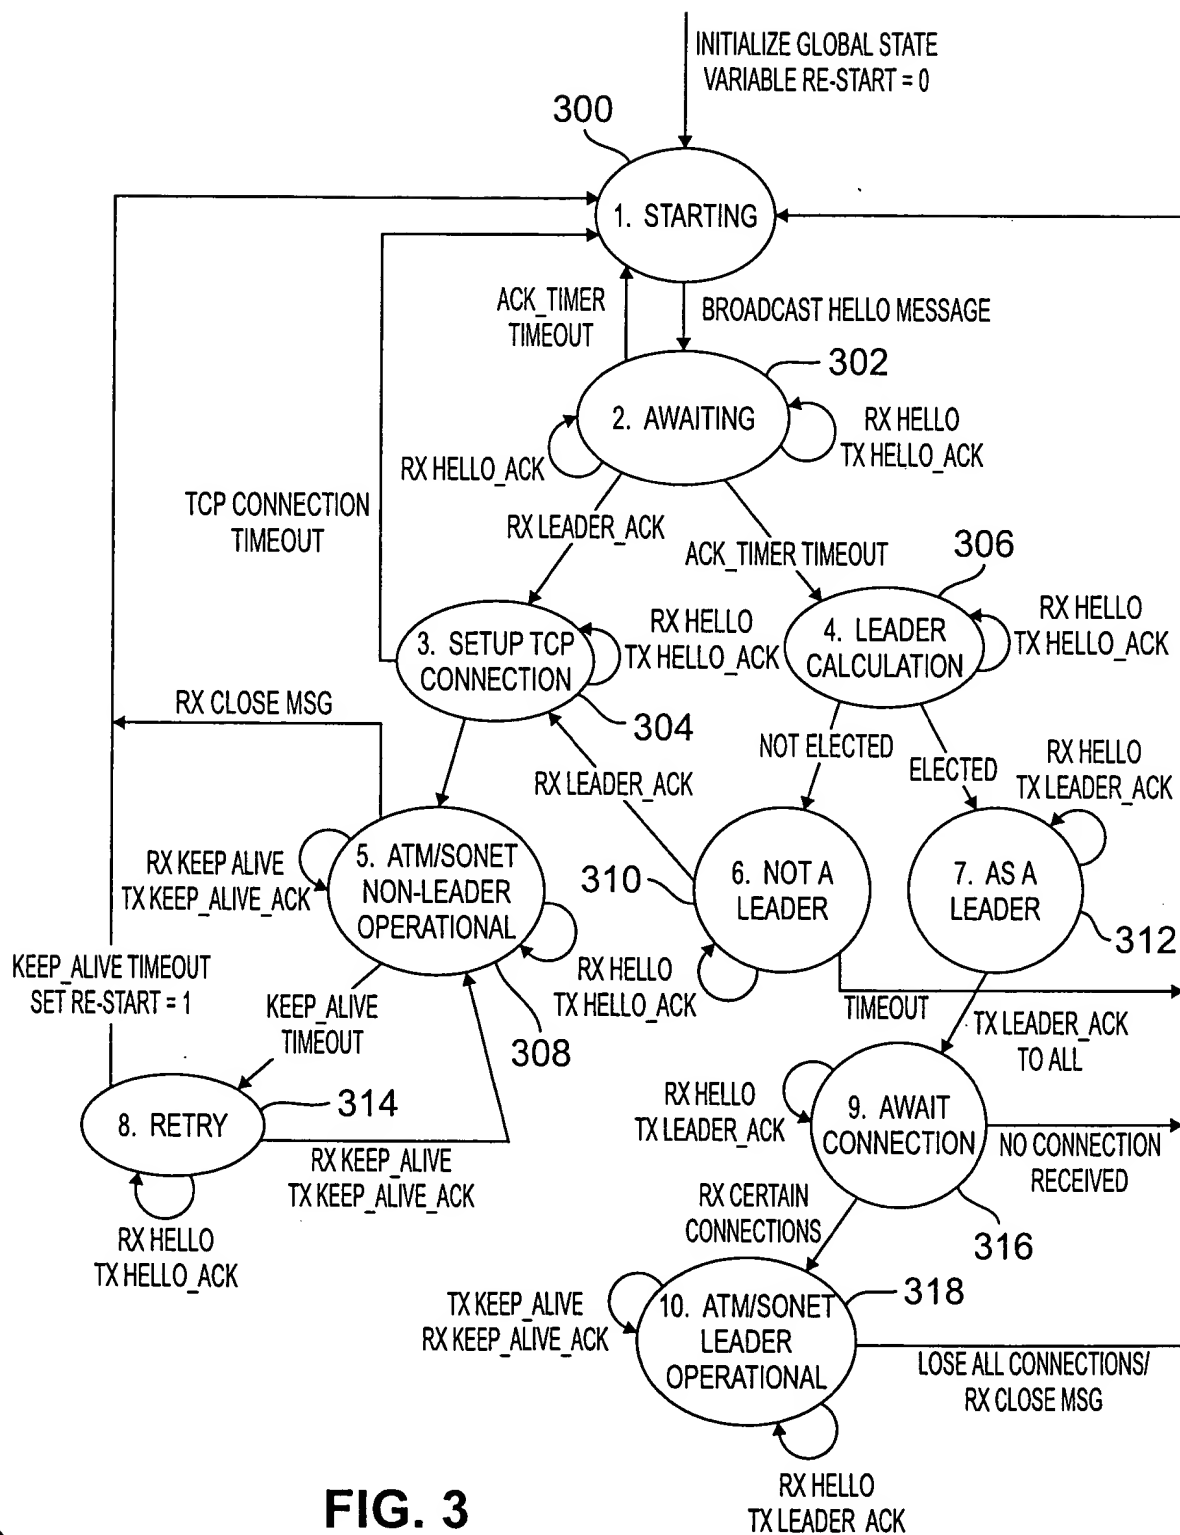


FIG. 3



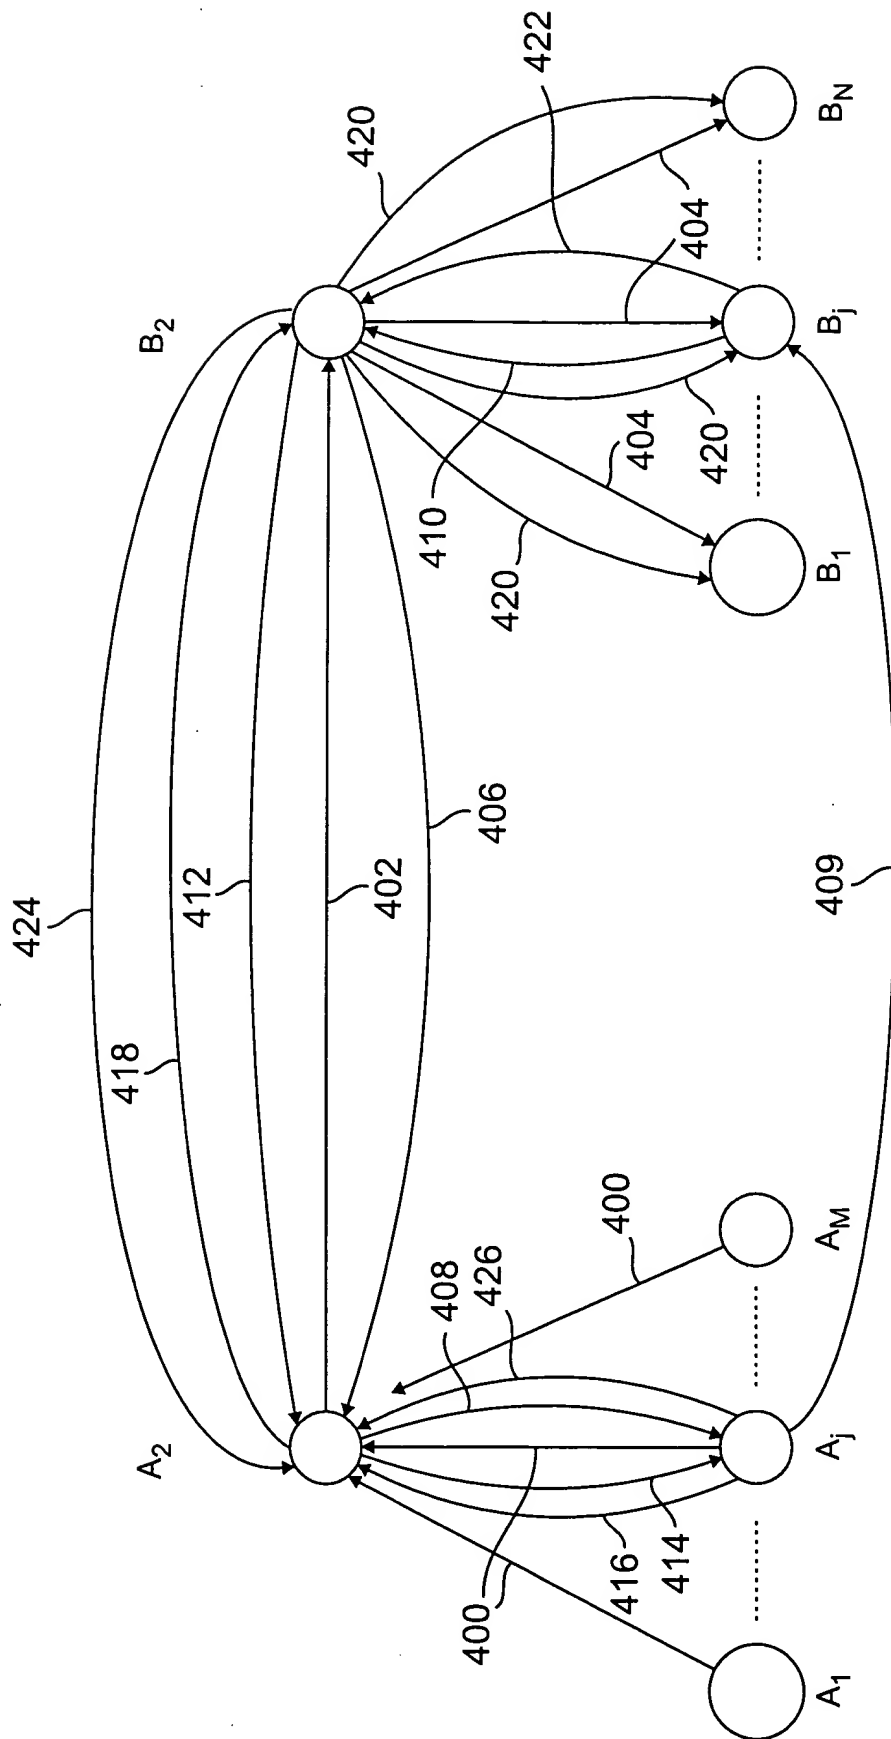


FIG. 4

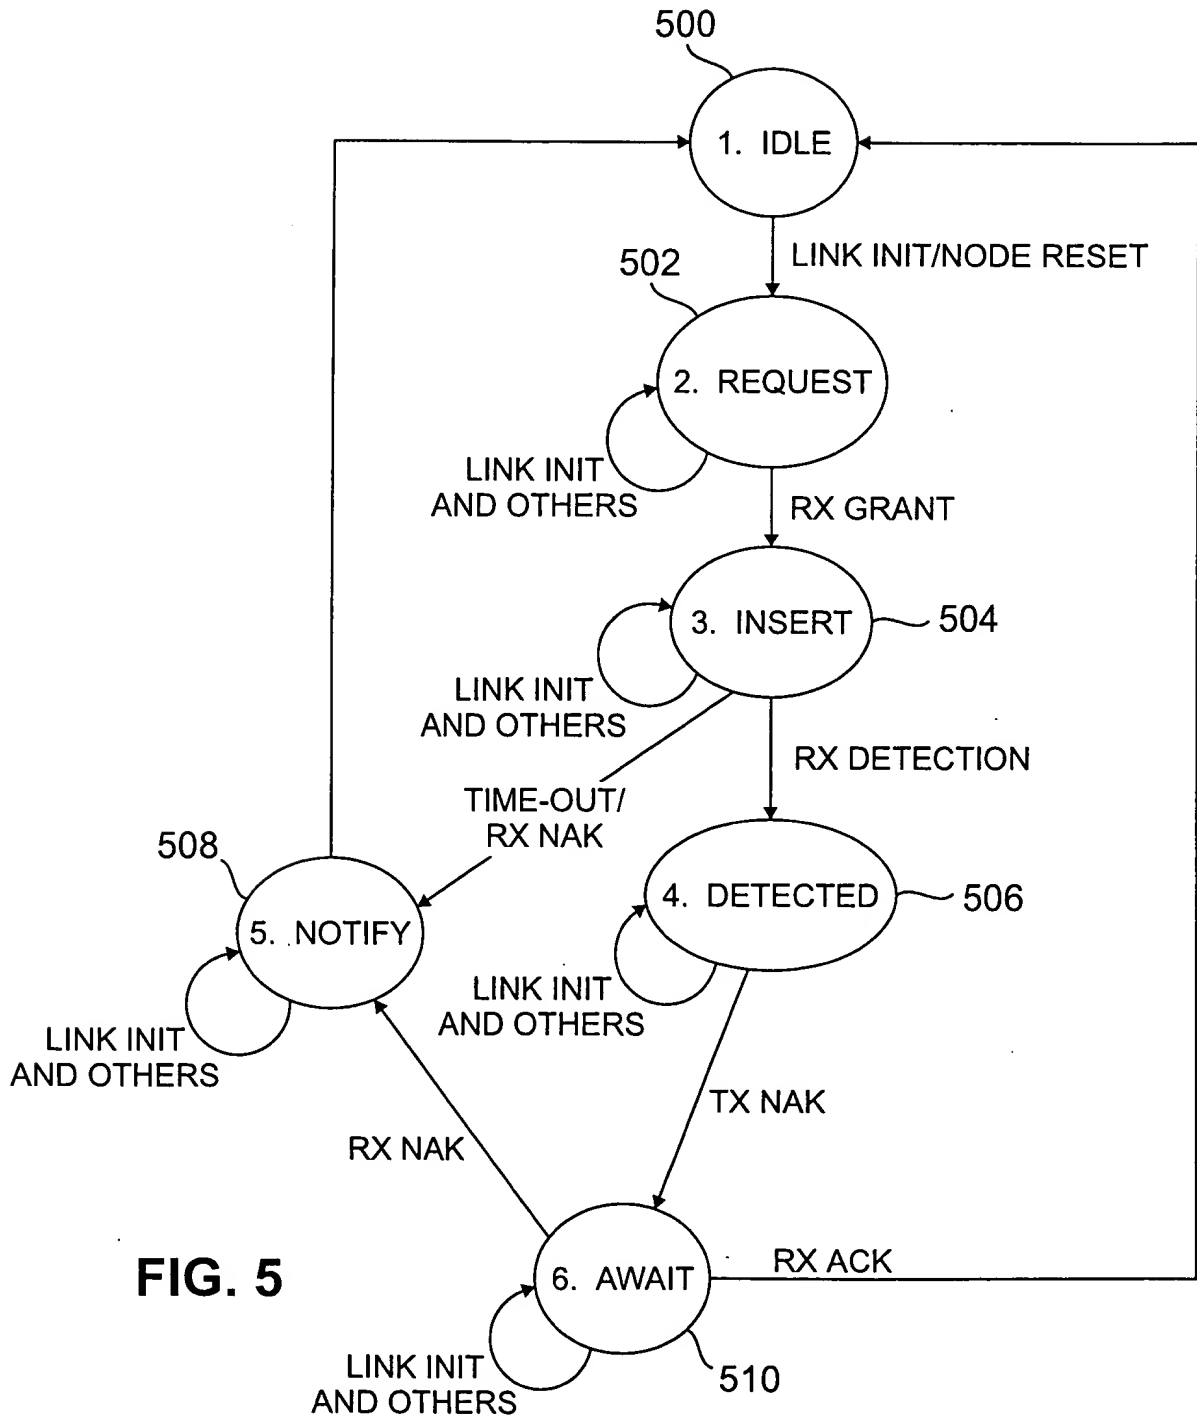


FIG. 5



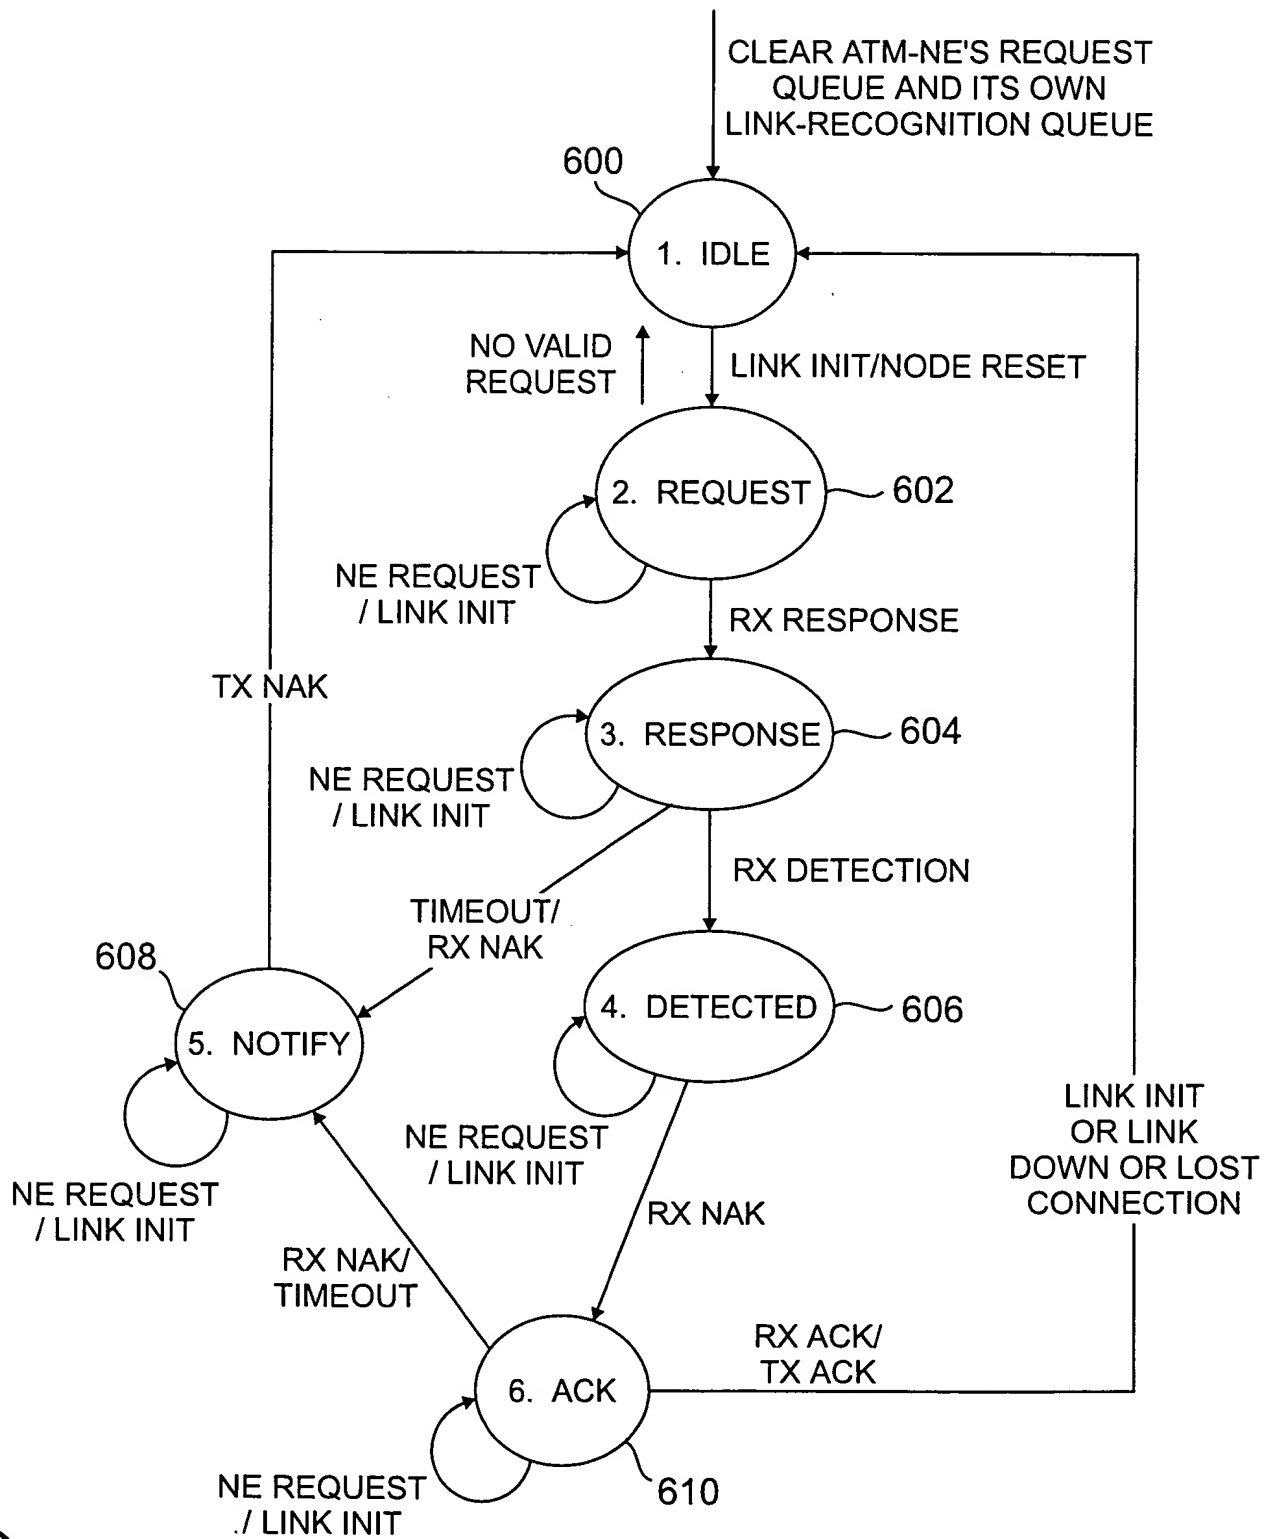


FIG. 6



7/8

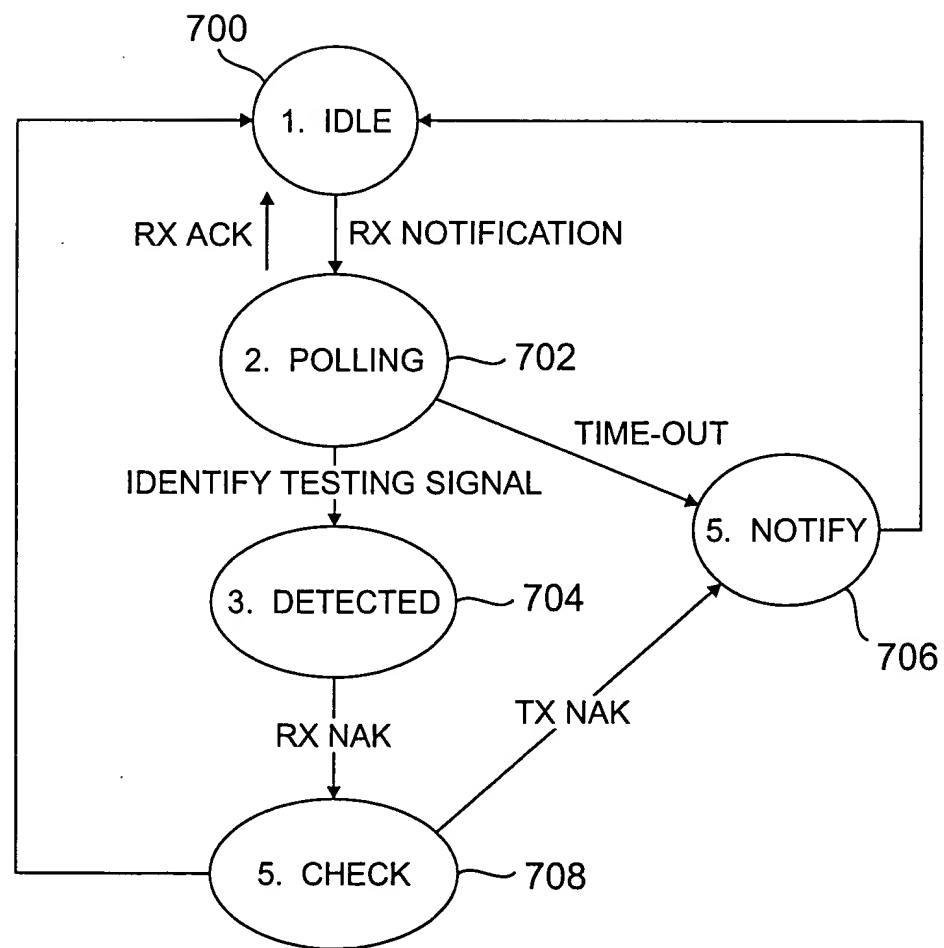


FIG. 7



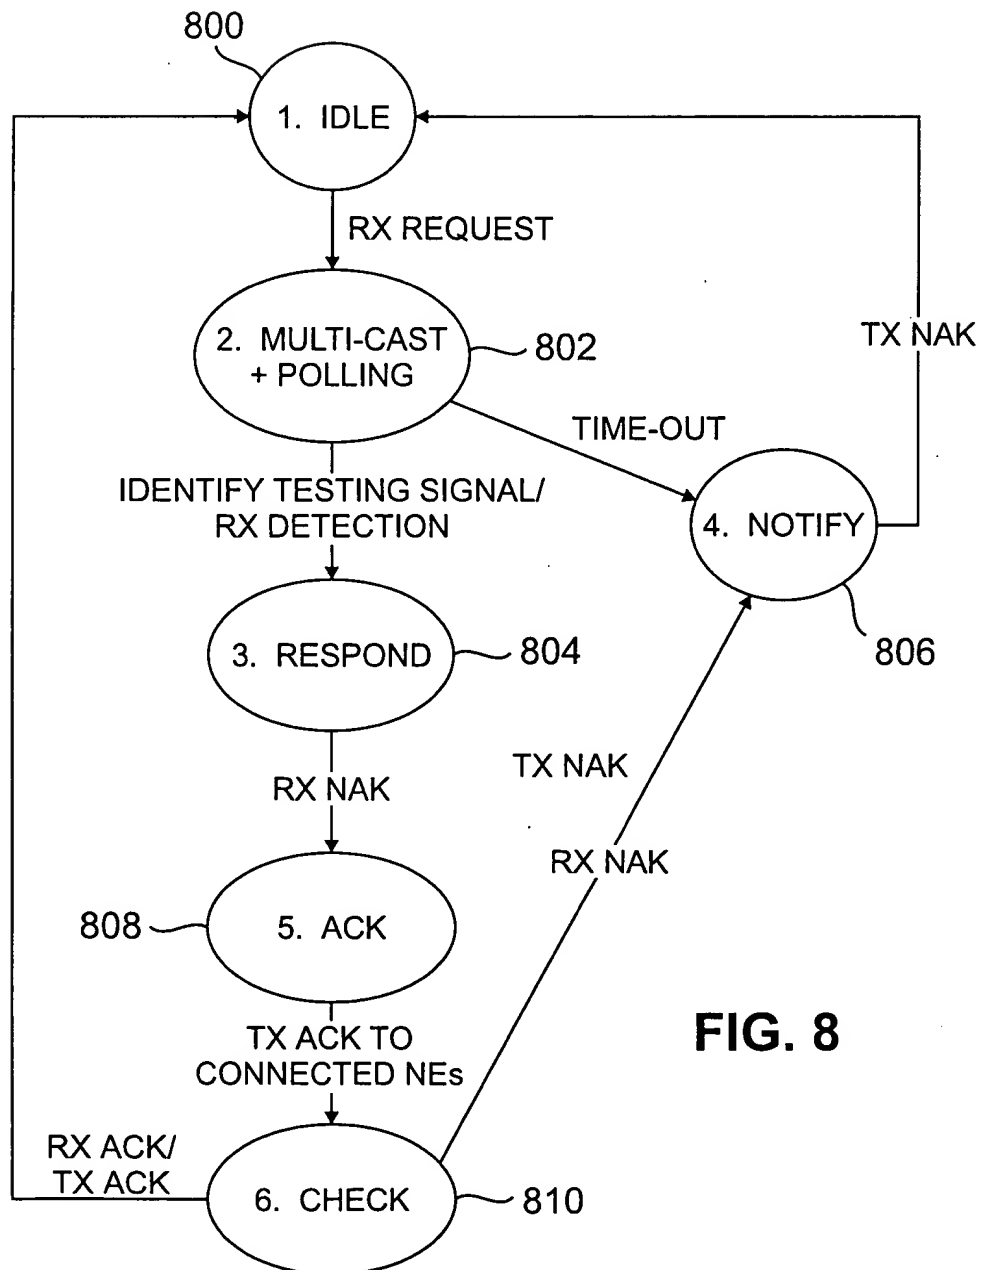


FIG. 8

